


ISO 6432 CYLINDER SENSORS




| Model/Item | CS1-M | |
|-------------------------------|--|---------|
| Switch Logic | STSP Normally open | |
| Sensor Type | Reed Switch with contact | |
| Operating Voltage (V) | 5-240V AC/DC | |
| Max. Switching Current (mA) | 100 | |
| Switching Rating (W) | Max. 10 | |
| Current Consumption | NO | |
| Voltage Drop | 2.5V Max.@100mA DC | |
| Cable | ø3.3, 2C Grey oil resistant PVC (Flame Retarded) | |
| Indicator | Red LED | |
| Leakage Current | NO | |
| Sensitivity (Gauss) | S06 - S10 | 45 - 55 |
| | S12 - S16 | 55 - 65 |
| | S20 - S40 | 65 - 75 |
| | A20 - 63 | 65 - 75 |
| Max. Frequency(Hz) | 200 | |
| Shock (m/s ²) | 300 | |
| Vibration (m/s ²) | 90 | |
| Temperature Range | -10 to +70°C | |
| Enclosure Classification | IP67 (NEMA6) | |
| Protection Circuit | NO | |



Ordering Code

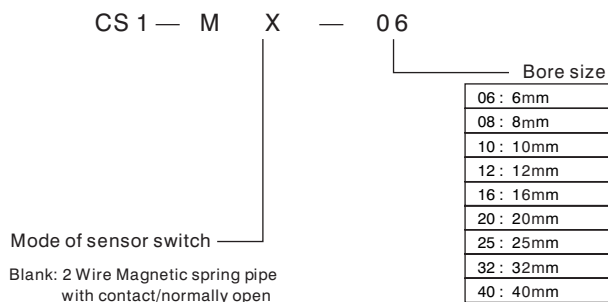

Dimensions

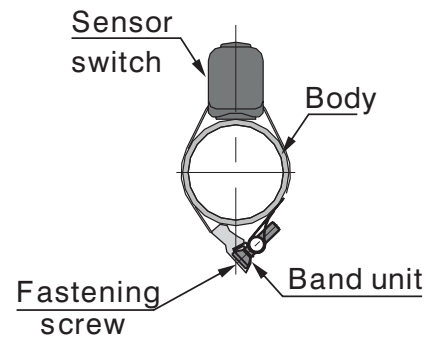

Wrap the fixing strap around the outside of the cylinder barrel. Snap the clamping screw into place, and adjust it to the proper position. Tighten the clamping screw to fix.

Mounting

