


300M Universal Beam Clamp

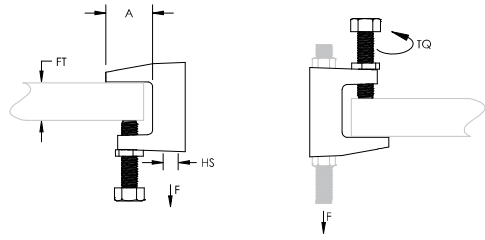

Material: Cast Iron
Finish: Electrogalvanized


Part Number	Article Number	Hole Size	Flange Thickness	A	Torque	Static Load	Certifications	Standard Packaging Quantity
Hole Type: Plain								
30009MM	389500	9 mm	18 mm Max	21 mm	14 N-m	1,200 N	VdS	100 pc
30011MM	389510	11 mm	20 mm Max	23 mm	14 N-m	2,500 N	FM, VdS	100 pc
30011MMSP5	175840	11 mm	20 mm Max	23 mm	14 N-m	2,500 N	FM, VdS	10 x 5 pc
30013MM	389520	13 mm	26 mm Max	35 mm	14 N-m	3,500 N	FM, VdS	80 pc
30017MM	389505	17 mm	28 mm Max	30 mm	14 N-m	5,500 N	FM, VdS	50 pc
3009MMSP5	175830	9 mm	18 mm Max	21 mm	14 N-m	1,200 N	VdS	10 x 5 pc
Hole Type: Threaded								
300M10	386820	M10	20 mm Max	23 mm	14 N-m	2,500 N	FM, VdS	100 pc
300M12	386830	M12	26 mm Max	35 mm	14 N-m	3,500 N	FM, VdS	80 pc
300M6	386805	M6	18 mm Max	21 mm	14 N-m	1,200 N		140 pc
300M6SP5	175910	M6	18 mm Max	21 mm	14 N-m	1,200 N		10 x 5 pc
300M8	386810	M8	18 mm Max	21 mm	14 N-m	1,200 N	VdS	100 pc

Setscrew must be tightened and torqued onto the sloped side of the I-beam.

310M Universal Beam Clamp, Thick Flange

Features

- Universal beam clamp for thick beams

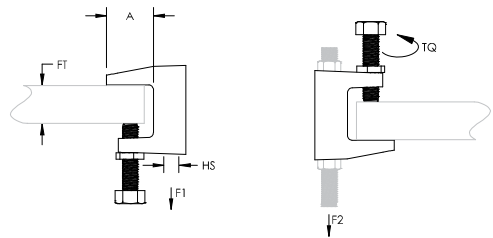

Material: Cast Iron
Finish: Electrogalvanized

Part Number	Article Number	Hole Size	Hole Type	Flange Thickness	A	Torque	Static Load 1	Static Load 2	Certifications
31011MM	598501	11 mm	Plain	31.8 mm Max	28.6 mm	7 N-m	2,200 N	1,100 N	FM, VdS
31013MM	598502	13 mm	Plain	31.8 mm Max	28.6 mm	15 N-m	4,200 N	3,300 N	FM, VdS
310M10	389890	M10	Threaded	31.8 mm Max	28.6 mm	7 N-m	2,200 N	1,100 N	cULus, FM, VdS
310M12	388890	M12	Threaded	31.8 mm Max	28.6 mm	15 N-m	4,200 N	3,300 N	cULus, FM, VdS

Setscrew must be tightened and torqued onto the sloped side of the I-beam.

